

|                       |                   |
|-----------------------|-------------------|
| <b>Category</b>       | Road Legal Lights |
| <b>Article-Number</b> | LTPZ-PX11E-1      |

## Technical Data

|                             |                                        |
|-----------------------------|----------------------------------------|
| <b>Input Voltage</b>        | 9–33 V                                 |
| <b>Light Source</b>         | 11 St. LED Chips                       |
| <b>Power Input</b>          | 12V: 54,5 W / 24V: 51,8 W              |
| <b>Raw lumen/-intensity</b> | 4.367 lm / 12/24V: 137.000/132.700 cd  |
| <b>Light Spread</b>         | 20°                                    |
| <b>Colour Temperature</b>   | 6.000 K                                |
| <b>Protection Class</b>     | IP69K: Test according to ISO 20653 013 |
| <b>Lens</b>                 | Sabic LEXAN LS2-111 Polycarbonate      |
| <b>Housing</b>              | Aluminum 6063                          |
| <b>Mounting</b>             | standing   hanging                     |
| <b>Connection</b>           | Deutsch-Plug DT04-2P                   |
| <b>Dimensions</b>           | 278,0 x 81,6 x 58,0 mm                 |
| <b>Homologation</b>         | ECE R112 Ref. 30, R10                  |
| <b>Shipping Weight</b>      | 1,50 Kg                                |
| <b>Product Weight</b>       | 1,36 Kg                                |

|                          |                            |
|--------------------------|----------------------------|
| <b>Protected against</b> | Reverse Polarity           |
|                          | RFI/EMC Interferences      |
|                          | Voltage and current surges |

|                         |                                                                                |
|-------------------------|--------------------------------------------------------------------------------|
| <b>Special Features</b> | shockproof                                                                     |
|                         | waterproof                                                                     |
|                         | uv-shielded                                                                    |
|                         | high-end materials and coatings                                                |
|                         | efficient polycarbonate-lensreflector                                          |
|                         | surrounding temperature: -40° – +95°                                           |
|                         | certified as roadlegal driving light and against electromagnetic interferences |

# 11" PRIME-X LED LIGHTBAR DRIVING LIGHT ECE 20°



*Headlamps shall be securely fixed and correctly positioned so that the light beam complies with all applicable requirements. If you are not familiar with the legal requirements for aligning your headlamps, please consult a specialist.*




anodized  
Polyester-Powdercoating

efficient  
Polycarbonate-Lensreflector

|                                 |                      |
|---------------------------------|----------------------|
| <b>Certifications: R112 R10</b> | Reference Number: 30 |
|---------------------------------|----------------------|




|                       |                   |
|-----------------------|-------------------|
| <b>Category</b>       | Road Legal Lights |
| <b>Article-Number</b> | LTPZ-PX11E-1      |
| <b>Light Spread</b>   | 20°               |

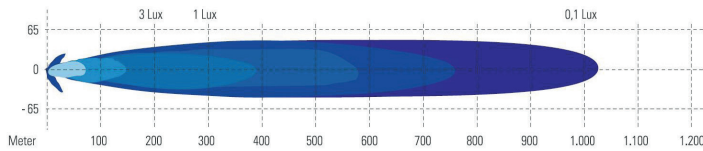

|                   |       |
|-------------------|-------|
| <b>Dimensions</b> | LxBxH |
|-------------------|-------|

### Included in Delivery

|                        |    |
|------------------------|----|
| <b>Bracket</b>         | 2x |
| <b>Screw Inbus</b>     | 2x |
| <b>Screw hexagonal</b> | 2x |
| <b>Snap ring</b>       | 4x |
| <b>Nut</b>             | 2x |
| <b>Washer</b>          | 4x |

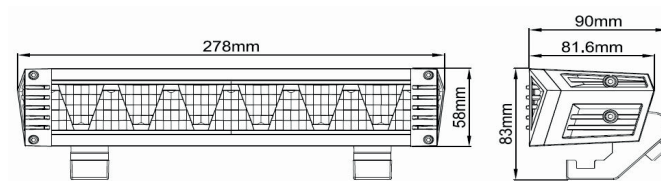

### Accessories (optional)

|                       |                                                                                                       |
|-----------------------|-------------------------------------------------------------------------------------------------------|
| <b>Description</b>    | Harness with 2 Plugs 12V                                                                              |
| <b>Application</b>    | The connection to the interior of the vehicle with switch for 2 LIGHTPARTZ <sup>®</sup> driving lamps |
| <b>Category</b>       | Connection harness                                                                                    |
| <b>Artikel-Nummer</b> | LTPZ-DT2                                                                                              |
| <b>Versandgewicht</b> | 0,7 Kg                                                                                                |
| <b>Artikelgewicht</b> | 0,5 Kg                                                                                                |
| <b>Lieferumfang</b>   | 2 Deutsch-Plugs<br>40A Relais<br>Fuse 30A<br>waterproof switch<br>app. 3m cable length                |

